



# Technical Data Sheet

Rev.: 002 – 15.11.2015

## Scheda MTP

Standard grade for label, parking and POS.

	Basis Weight g/m <sup>2</sup>	Thickness µm	ISO-Brightness %	Smoothness s	Tensile str. (MD) kN/m	Tensile str. (CD) kN/m	Moisture %
Scheda MTP 51	51 + / - 3	58 + / - 3	85	min. 250	4,0	3,0	6 + / - 2
Scheda MTP 53	53 + / - 3	62 + / - 3	85	min. 250	4,0	3,0	6 + / - 2
Test Method	ISO 536	ISO 534	ISO 2470	ISO 5627	ISO 1924-2	ISO 1924-2	ISO 287


Optical density at 85°C – 1,1.

Stability of image 3 years at correct storage.

Tolerance of rolls width + / - 3mm.


Rolls width 640, 810 and 1040mm.

Dynamic Sensitivity

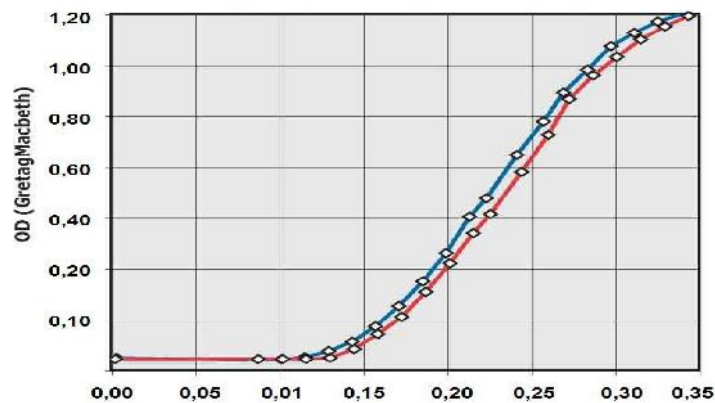

red: printing speed 76 mm/sec  
blue: printing speed 103 mm/sec

Static Sensitivity

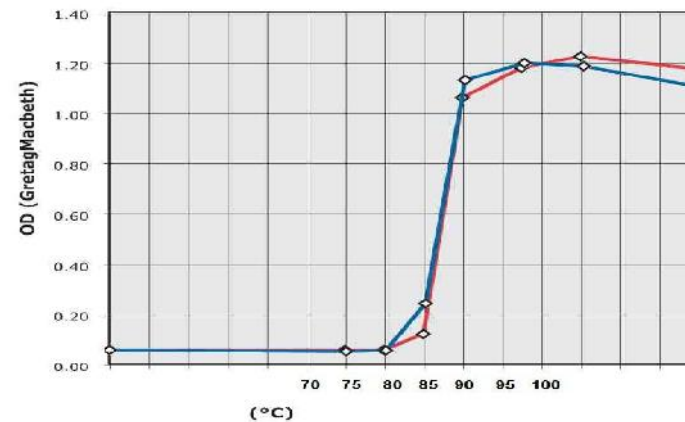

red: contact time 5 sec  
blue: contact time 10 sec